

# Trailer Smart Installation Guide

## 1. Determine Best Unit Location

It is important to find a suitable location to install the Trailer Smart tracking unit where by it can obtain the best GPS connection possible.

Avoid obstacles and ensure a clear view to the ground, towards the rear of the trailer behind the last axle is the optimal position.



## 2. Fixing Trailer Unit In Position

Fix the Trailer Smart unit in position to the underside of the trailer floor ensuring clear view of the ground to maximise GPS connectivity.


It is advised to mount clear of any metallic objects as this can reduce the quality of the GPS connection.



## 3. Routing & Fixing Power Cable

Route the Trailer Smart unit power cable via the chassis, adjacent to any existing cabling and fix at regular intervals using cables ties or conduit where required.

Route the power cable to the trailer's ECU unit and coil/fix any excess cable out of sight.

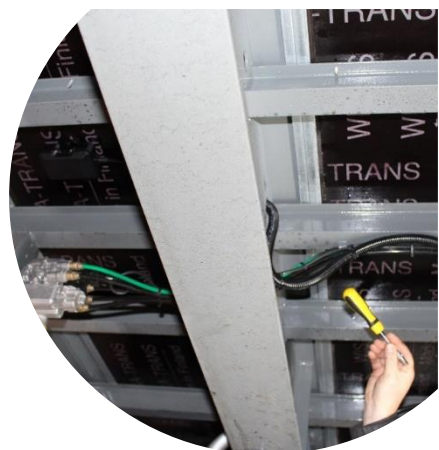

## 4. Open & Connect to the ECU Auxiliary Port No. 2

Connect the power connector from the Trailer Smart unit (Haldex plug) to the ECU's auxiliary port number 2 by removing the green waterproof socket cover (press down on the green release tab, and pull the cap/cover towards you), and inserting the trailer power connector in to the auxiliary port. The connector will physically 'click' once locked in to position. Power up the trailer and the Trailer Smart unit will light up to confirm it is connected.

